


051790

LA-BO

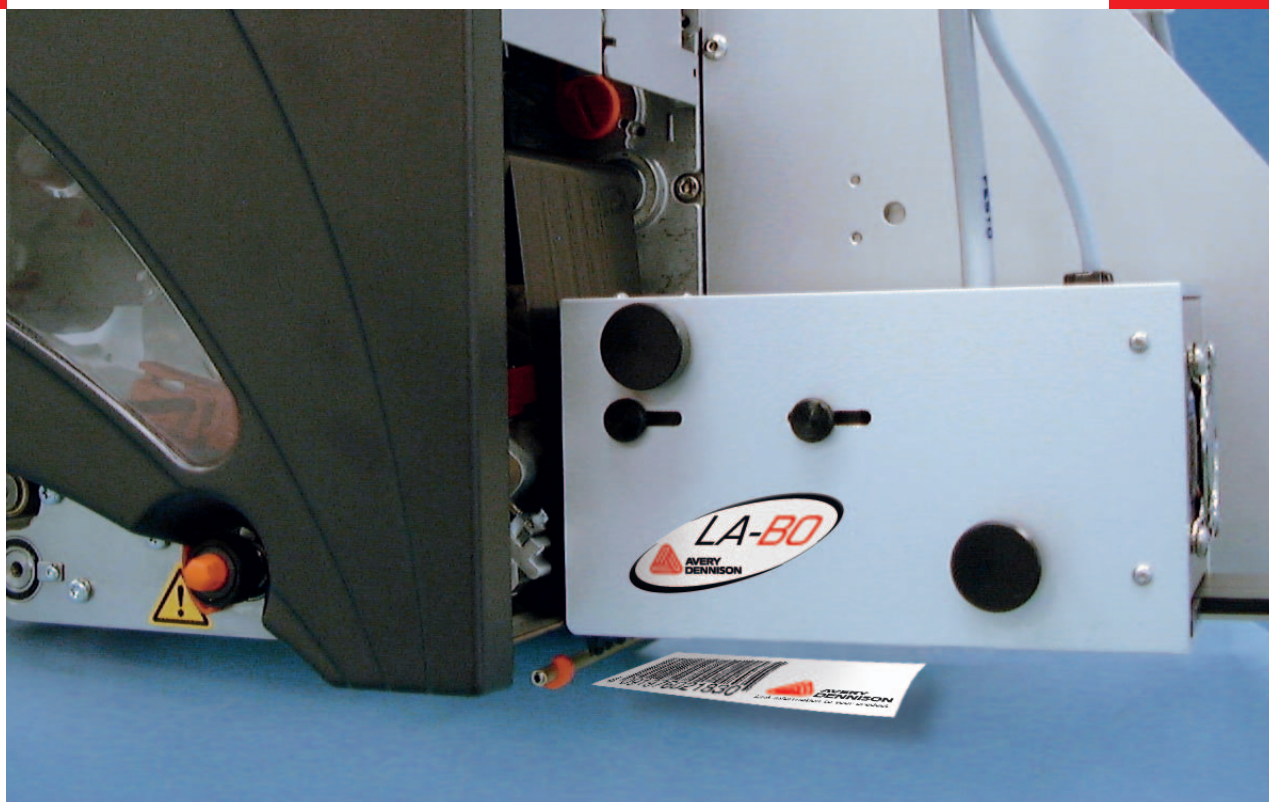

The gentle blow-on applicator

The benefits of the new **Label Applicator Blow-on**:

- ✓ Non-contact labelling of sensitive products
- ✓ Pivoting applicator allows comfortable material change
- ✓ Sliding bars enable fast and easy setting of label size
- ✓ Easy attachment with model-specific mounting plates
- ✓ Minimal wear parts mean minimal maintenance

Designed for ALS 20x, ALS 256 and ALX 92x-Series




**AVERY
DENNISON**

Monarch®
Products and Services

The Applicator LA-BO at a Glance

Material specifications			
Type of labelstock:	Self-adhesive label		
Label material:	Paper and synthetic material up to 240 g/m²		
Label width:	30 - 100 mm*		
Label length:	30 - 100 mm*		
* Different label sizes can be accommodated by use of easy adjustable sliding bars.			
Labelling function			
Label position:	Top, bottom or side of product		
Compatible for:	ALS 204, ALS 206 ALS 256, ALX 92x	ALX needs Applicator Interface Basic. For ALS this is recommended. available for right- and lefthand models	
Capacity:	ALS 20x, ALS 256 ALX 92x	50 x 50 mm: 100 x 100 mm: Real 1:1 mode: Batch Mode: Based on label size of 80 x 80 mm, print speed 10"/s	up to 160 labels/min up to 100 labels/min up to 80 labels/min up to 120 labels/min
Max. blow distance:	50 x 50 mm label: 100 x 100 mm label:	100 mm 50 mm	
Placement Accuracy:	max. +/- 1 mm The best positioning results are obtained with label sizes from 40 x 40 mm to 80 x 80 mm; round labels from 40 to 70 mm diameter		
Sizes (incl. mounting plate)			
W x H x D:	ALS ALX	357 x 188 x 153 mm 300 x 345 x 153 mm	
Weight:	3.5 kg		
Connections			
Power supply:	24 V		
Air consumption:	1 Liter pro Anblasvorgang		
Air supply:	5 bar, dry and clean		
Environmental Data			
Operating temperature:	5° - 40° C		
Humidity:	30 - 80 % (non-condensing)		
Noise level:	82 dB during blow-cycle		
Protection class:	IP 21		
Standards:	CE certified		



You're never far from an
Avery Dennison representative:

Benelux
Denmark / Scandinavia
France
Germany

Iberia
India
Italy

Poland
PR China / Hong Kong
Turkey

UAE
UK
USA

Avery Dennison Deutschland GmbH
Ohmstrasse 3, D-85386 Eching
Phone: +49/(0) 81 65/925 - 299
Fax: +49/(0) 81 65/6 43 60
printers@eu.averydennison.com
www.machines.averydennison.com

