

Stylish & Elegant POS System

POSolution 5000 Series



TYSSO®

Insist on the Best



With Rear
Customer Display



Tilting Angle
0~75 Degrees



Without PKB





Side USB
& PS2 Ports

FEATURES

- High performance ULV processor speed up to 1.00GHz
- 15"/12.1" touch screen & versatile I/O ports
- Compact and solid industrial design
- Rear panel ventilators with water spill proof
- Front panel with water spill proof
- Well cable management
- Low noise system with reliable thermolysis
- Wide range tilting angle 0 ~ 75 degrees
- Right-sided PS2 & USB ports for friendly installation
- With two internal speakers
- Optional MSR / I Button reader / rear customer display
- Optional 44 keys programmable keyboard for retail market

SPECIFICATIONS

	POS-5015	POS-5012
	Main Board	
CPU	Intel Celeron 1.0GHz BGA Type	
Core Logic	Intel 852GM + ICH4	
System Memory	200-pin SODIMM, DDR266/333, 256MB/512MB/1GB	
OS Support	Win2000, NT, Win XP Pro, WinCE, WEPOS	
	Display	
TFT LCD	15"	12.1"
Brightness	250 nits	180 nits
Resolution	1024 x 768 Pixel	
Touch Screen	5 Wire Resistive Type	
Tilting Angle	0 ~ 75 Degree	
	Storage Device	
HDD	1 x EIDE 2.5" Type or SATA	
Compact Flash	1 x Slot Type II, Non-removable	
	I/O Ports	
Serial	4 x RS-232 DB-9 COM1/2/4: Pin 9 RI/5V/12V Selected by Jumper	
USB	3 x USB2.0 External 1 x USB2.0 External for Touch BD 2 x USB2.0 Internal Reserved	
PS/2 Mouse	1 x 6-pin Mini DIN	
PS/2 KB	1 x 6-pin Mini DIN	
Programmable KB	1 x 8-pin Pitch 2.0	
LAN	1 x RJ45, 10/100 Base-T	
VGA	1 x DB-15, Female	
DC Out	1 x 12VDC Jack for Customer Display	
Cash Drawer	1 x RJ11, 12VDC	
Audio Jack	1 x Audio Out with Internal Speaker 2W x 2	
	Others	
Power Input	External Adapter 12VDC 90W, 4-pin Connector with Lock	
Color	Black	
Compliance	FCC / CE / WEEE / RoHS	
Weight	7.5 Kg	7 Kg
Dimension (W x D x H: mm)	368 x 345 x 390	305 x 345 x 365
Operating Temperature	5 °C ~ 40 °C	
Storage Temperature	-20 °C ~ 60 °C	
Storage Humidity	20% - 80% RH, non-condensing	
	Optional Accessories	
Keyboard	Programmable 44 Keys, KB I/F	
Customer Display	Rear VFD, 20 x 2 Characters, RS232 I/F	
MSR	3 Tracks KB	
I Button	Dallas Key RS232 I/F	

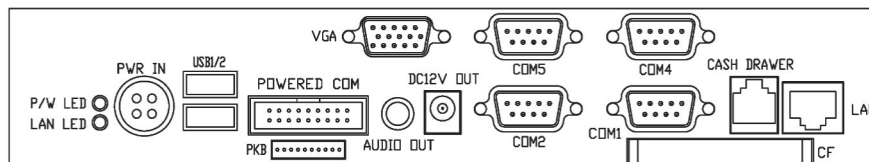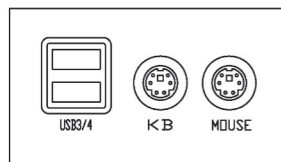

Manufacturer
FAMETECH INC.
 2F, No. 165, Sec. 2, Ta-Tung Rd.,
 Hsi-Chih 221, Taipei Hsien, Taiwan
 Tel : 886-2-8692-6300
 Fax: 886-2-8692-6301
 E-Mail: tyssso@ms6.hinet.net
 URL: http://www.fametech.com.tw

Distributor