

Low-noise, Inexpensive POS System

POSpark 5700 Series



TYSSO®

Insist on the Best



Tilting Angle
15° ~ 80°

With Customer
Display

Optional 2nd
VGA Display



Left-sided
PS2/USB

FEATURES

- High performance ULV processor speed up to 1.00GHz
- Compact and solid industrial design
- Low noise system with reliable thermolysis
- Wide range tilting angle 15 ~ 80 degrees
- Left-sided PS2/USB for friendly installation
- Optional MSR/Customer Display/2nd VGA Display
- Rear panel ventilators with water spill proof
- Front panel with water spill proof
- Internal power adapter hidden on base
- Cost effective

SPECIFICATIONS

Model	POS-5717	POS-5715	POS-5712
Main Board			
CPU	Intel Celeron M 1.0GHz BGA Type		
Core Logic	Intel 852GM + ICH4		
System Memory	200-pin SODIMM, DDR266/333, 256MB/512MB/1GB		
OS Support	Win2000, NT, Win XP Pro, WinCE, WEPOS		
Display			
TFT LCD	17"	15"	12.1"
Brightness	300 nits	250 nits	180 nits
Resolution	1280 x 1024 Pixel	1024 x 768 Pixel	
Touch Screen	5 Wire Resistive Type		
Tilting Angle	15 ~ 80 Degrees		
Storage Device			
HDD	1 x EIDE 2.5" Type or SATA		
Compact Flash	1 x Slot Type II, Non-removable		
I/O Ports			
Serial	4 x RS-232 DB-9 COM1/2/4: Pin 9 RI/5/12V Selected by Jumper		
USB	3 x USB2.0 External 1 x USB2.0 External for Touch Panel 2 x USB2.0 Internal Reserved		
PS/2 Mouse	1 x 6-pin Mini DIN		
PS/2 Key Board	1 x 6-pin Mini DIN		
Extend KB	1 x 8-pin Pitch 2.0		
LAN	1 x RJ45, 10/100 Base-T		
VGA	1 x DB-15, Female		
DC Out	1 x 12VDC Jack for Customer Display		
Cash Drawer	1 x RJ11, 12VDC		
Audio Out	1 x Audio Jack with Internal Speaker 2W x 2		
Others			
Power Input	Internal Adapter 12VDC 90W, 4-pin Connector with Lock		
Color	Black or Silver		
Compliance	FCC / CE / WEEE / RoHS		
Weight	7 Kg	6.5 Kg	6 Kg
Dimension (W x D x H : mm)	415 x 320 x 410	367 x 320 x 360	345 x 320 x 340
Operating Temperature	5 °C ~ 40 °C		
Storage Temperature	-20 °C ~ 60 °C		
Storage Humidity	20% - 80% RH, Non-condensing		
Optional Accessories			
Customer Display	VFD / LCD, RS232 I/F		
MSR	3 Tracks, KB or RS232 I/F		
2 nd Display	10.4" / 12.1" / 15" LCD VGA I/F		

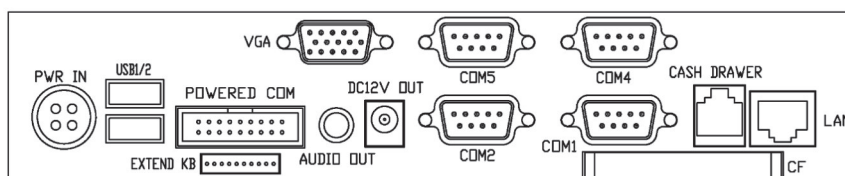

Manufacturer
FAMETECH INC.
 2F, No. 165, Sec. 2, Ta-Tung Rd.,
 Hsi-Chih 221, Taipei Hsien, Taiwan
 Tel : 886-2-8692-6300
 Fax: 886-2-8692-6301
 E-Mail: tysso@ms6.hinet.net
 URL: http://www.famotech.com.tw

Distributor