

Robust, I/O-Rich POS System

POStation 7000 Series



TYSSO®

Insist on the Best



With Second Display



With Customer Display



Wide Range Tilting Angle




Wall Mount

FEATURES

- High performance processor speeds up to P4/Celeron 2.00GHz
- Steady aluminum die casting base
- Versatile I/O ports
- Tilting angle 0~80 degree
- Easy maintenance for HDD
- Well cable management
- Dual display optional
- MSR card reader / I button optional
- Wall mountable by bracket kits
- Easy access compact flash
- Water spill proof
- 802.11 WLAN function by mini PCI card optional

SPECIFICATIONS

Main Board	
CPU	P4 / Celeron 2.0GHz up
Core Logic	Intel 852GM + ICH4
System Memory	SODIMM, DDR266/333, 256MB up to 1GB
OS Support	Win2000, NT, Win XP, Embedded XP(XPe), WinCE, WEPOS
Display	
TFT LCD	15"
Brightness	250 nits
Resolution	1024 x 768 Pixel
Touch Screen	5 Wire Resistive Type
Tilting Angle	0 ~ 80 Degree
Storage Device	
HDD	1 x EIDE 2.5" Type
Compact Flash	1 x Slot Type II, Non-removable
I/O Ports	
Serial	6 x RS-232 COM 3 / 4 / 5 / 6: DB-9, male (Pin 9 RI or 5V or 12V Selectable) COM 1 / 2: Internal for I Button and MSR
Parallel	1 x DB-25, female, supports EPP/ECP
USB	4 x USB 2.0 External 1 x USB 2.0 Internal for Touch Control BD 1 x USB 2.0 Internal Reserved
PS/2 Mouse	1 x 6-pin mini DIN
PS/2 KB	1 x 6-pin mini DIN
LAN	1 x RJ45, 10/100 Base-T, supports wake on LAN
VGA	1 x DB-15, female
DC Jack	1 x 12VDC Output for 2nd Display
Cash Drawer	1 x RJ11, 12VDC
Audio Jack	1 x Mic In, 1 x Audio Out
Expansion	1 x Mini PCI
Others	
Power Input	External Adapter 12VDC 150W
Color	Black
Compliance	FCC / CE / WEEE / RoHS
Weight	10 Kgs
Dimension (W x D x H)	367 x 335 x 356 mm
Operating Temperature	5 °C ~ 35 °C
Storage Temperature	-20 °C ~ 60 °C
Storage Humidity	20% - 80% RH, non-condensing
Optional Accessories	
2 nd Display	15" / 12.1" / 10.4" TFT LCD
Customer Display	Pole VFD, 20 x 2 characters, RS232 I/F
MSR	3 Tracks, KB or RS232 I/F
I Button	Dallas Key RS232 I/F
Wall Mount Bracket	VESA Bracket Kits

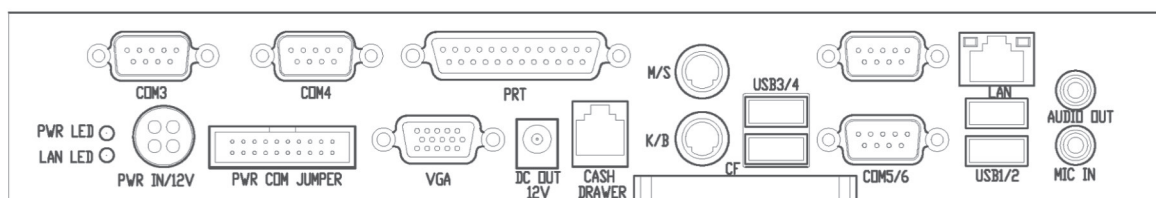

I/O Ports



Manufacturer

FAMETECH INC.2F, No. 165, Sec. 2, Ta-Tung Rd.,
Hsi-Chih 221, Taipei Hsien, Taiwan

Tel : 886-2-8692-6300

Fax: 886-2-8692-6301

E-Mail: tyssso@ms6.hinet.netURL: <http://www.fametech.com.tw>